


CRX-K

Cylindrical Lock with Ligature Resistant Trim-Knob

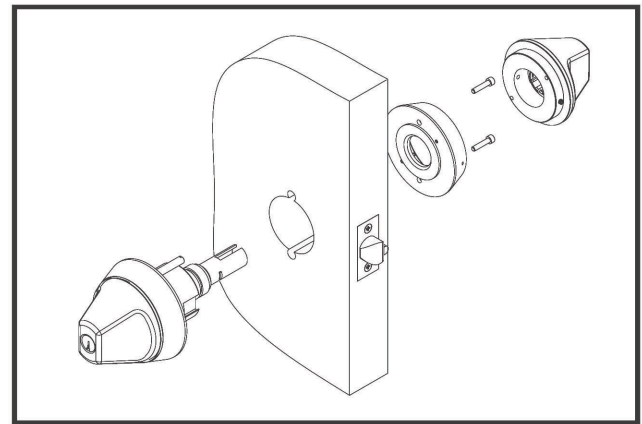

Specifications

- For facilities housing patients at risk
- For door thickness 1-3/4"-2"
- 2-3/4" backset standard, 5" optional
- Non-handed
- Refer to Function Section for available functions
- 630 (US32D) finish
- Stainless steel rose, 4" in diameter
- Stainless steel knob, ligature resistant
- Stainless steel faceplate, 1-1/8" x 2-1/4"
- Stainless steel strike, ASA, 1-1/4" x 4-7/8"
- Through-bolt mounting, tamper resistant mounting screws, for wood and metal door
- Brass cylinder with stainless steel cover, 6 pin, Schlage "C" keyway standard, 2 keys per cylinder
- Small Format IC not available
- High Security Cylinder available, TownSteel "L" keyway, 6 pin
- 10-year limited warranty

Code Compliance

- ANSI/BHMA A156.2: Meet Industry Standard
- UL/ULC: UL 10C Listed 3 Hour Fire Rating
- BAA: Meets requirements of the Buy American Act



Important Note

It is TownSteel's position that if any of our keyed locks are to be used less cylinder, whether I.C. or standard, and another manufacturer's cylinder is to be used in place of the TownSteel original manufacturer's cylinder, that a sample of that product be provided to TownSteel in advance for testing.

How To Order

Trim	CRX-K Ligature Resistant Knob Grade 1 Cylindrical Lock	<div style="text-align: center;"> <p>Function</p> <p>CRX-K - 84 - SC</p> <p>Trim Cylinder</p> </div>
Function	Please Refer to Function Sheet	
Cylinder	SC / L6	