

**EF 37 27 3684 630 CD3 LBR**
**Rating**

ED Panic exit hardware  
 EF Fire exit hardware

**Device model**

37 3700 series Narrow stile  
 89 8900 series  
 97 9700 series

**Device type**

00 Rim  
 27 Surface vertical rod  
 47 Concealed vertical rod  
 57 3 point device (For 9700 series only)  
 75 Mortise

**Device size**

36 36" (914mm)  
 48 48" (1219mm)  
 consult factory for others

**Door height**

blank For Rim and Mortise  
 84 84" (2134mm) (for SVR, CVR, 3PT and LBR)  
 96 96" (2438mm) (for SVR, CVR, 3PT and LBR)

**Finish**

630 Satin stainless steel finish  
 consult factory for others

**Options**

Blank	For regular device		
DE	Delayed egress	E	Electric mortise lock
LX	Latch bolt monitoring	CD3	3700 Series cylinder kit
LRX	Latch bolt+RQE monitoring	CD8	8900 Series cylinder kit
RX	RQE monitoring	CD9	9700 Series cylinder kit
2RX	Double RQE monitoring	AK3	3700 Series alarm kit
ELR	Electric latch retraction	AK8	8900 Series alarm kit
SS	Signal switch	AK9	9700 Series alarm kit

**Less bottom rod option**

Blank For regular device  
 LBR Less bottom rod SVR device

**Strikes and Shim Kits**


STK 600 (standard)	8900 Series Rim device
STK 900 (standard)	9700 & 3700 Series Rim/3PT device
STK 701 (optional)	8900 Series Rim device
O-STK 710 (optional)	8900, 3700, 9700 Series Rim device
T-STK 720 (standard)	SVR & 3PT
T-STK 720C (standard)	CVR
B-STK 730 (standard)	SVR & 3PT
B-STK 730C (standard)	CVR
B-STK 731 (optional)	SVR
B-STK 732 (optional)	SVR and CVR
B-STK 733 (optional)	SVR and CVR
SK-750 (standard)	Shim Kit for STK 600
SK-751 (optional)	Shim Kit for STK 701
SK-950 (standard)	Shim Kit for STK 900
SK-952 (standard)	Shim Kit for O-STK 710

**Accessories**

FP-760	Filler plate
FP-761	Filler plate
ETR-1	Extension rod 1'(305 mm)
ETR-1C	Extension rod 1' ( for CVR)(305 mm)
ETR-2	Extension rod 2'(610 mm)
ETR-2C	Extension rod 2' ( for CVR)(610 mm)
SNB-1	Sex nuts & bolts 1 1/4"-2" door(32-50.8 mm)
SNB-2	Sex nuts & bolts 2"-2 1/4" door(50.8-57 mm)
GSK-6R	Glass shim kit (8900 Series Rim)
GSK-3R	Glass shim kit (9700 Series Rim)
GSK-6V	Glass shim kit (8900 Series SVR, LBR, 3PT)
GSK-3V	Glass shim kit (9700 Series SVR, LBR, 3PT)
FL01-SS	Auxiliary Fire Latch bolt (LBR)
DK	Dogging Key

# 9700 Series Exit Devices

## General Information

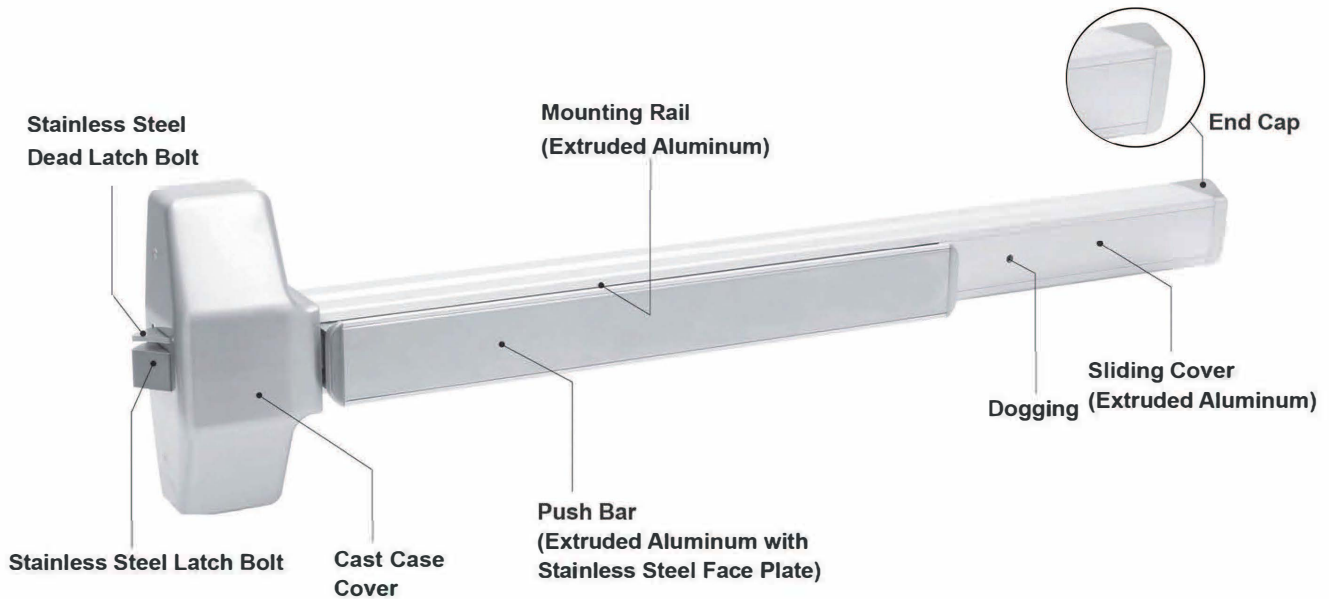


## Features

- Full line of exit devices are certified to ANSI/BHMA A156.3 Grade1.
- All devices are non-handed or reversible design.
- UL Listed for Fire Exit hardware, 3 hours.
- High shock-resistant latching mechanical design for vandalism protection.
- "A" Label (3 hr) rating on pairs of doors up to 8' x 8' for same or double egress.
- All internal components are made of electro-plated corrosion-resistant alloy.

## Dimensions

### Standard for Door Width 36"

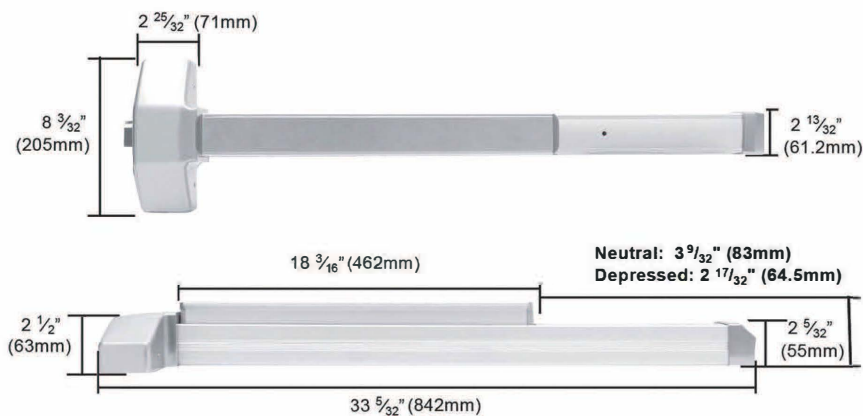

For Door Width	Device Size
28" (711 mm)	Please Consult Factory
48" (1219 mm)	48" (1219 mm) available

# ED9775 / EF9775

## —Mortise Exit Device

MTP



### Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	905 Mortise Strike standard
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	39 3/16" (99.5cm) from CL to finished floor
<b>ANSI</b>	Certified ANSI/BHMA A156.3 Grade 1 standard
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None