

# Motorized Cylindrical Lock

## ★ US PATENTS

# 8844330

# 9394722

# 9528300

# 9372542



## Mechanical Specifications

- Door Thickness: 1-3/4"
- Backset: 2-3/4" standard, optional: 5", 2-3/8"
- Rigid or Clutched trim
- Latch Bolt: stainless steel, deadlocking, 1/2" throw
- Faceplate: 1-1/8" x 2-1/4"
- Strike: ASA strike standard, 1-1/4" x 4-7/8"
- Escutcheon: Steel or zinc alloy
- Lever: Zinc or stainless steel

## Available Lever Styles



Sentinel(S)

Quest(Q)

Gala(G)

Wolfsburg(W)

Wolfsburg R(WR)

## Cylinder Specifications

### Key in lever option:


- **SC** Schlage® 6-pin with "C" keyway, standard
- **K6** Kwikset® 6-pin with "KW" keyway
- **HS6** High security 6-pin with TownSteel® "L" keyway
- **SF6** Best® 6-pin, IC core with "A" keyway
- **SF7** Best® 7-pin, IC core with "A" keyway
- **HS7** High security 7-pin, IC core with TownSteel® "L" keyway

### Less cylinder option:

- **SF** Schlage® small format IC, SFIC
- **SLF** Schlage® large format IC, SLFIC
- **CLF** Corbin® large format IC, CLFIC



## Profile

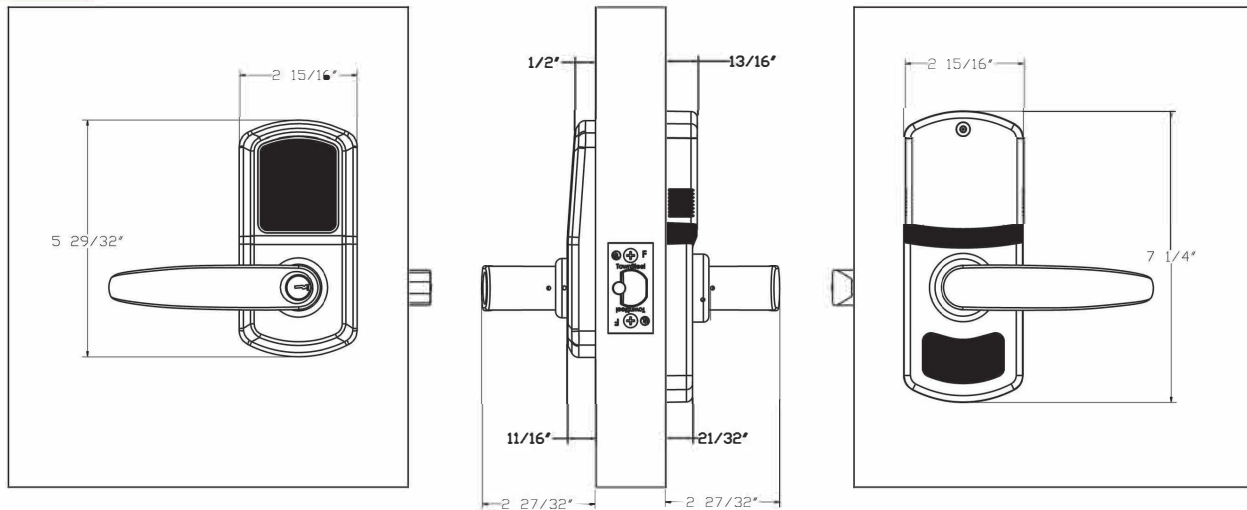

## How To Order

<b>Series</b>	e-Elite 6000
<b>Lockbody</b>	1: Rigid / 2: Clutched
<b>Lever Style</b>	S: Sentinel / Q: Quest / G: Gala / W: Wolfsburg / WR: Wolfsburg R
<b>Finish</b>	619: US15, Satin Nickel / 622: US19, Flat Black 626: US26D, Satin Chrome Or special color upon request
<b>Cylinder</b>	SC(KIK 6 pin) / K6 / HS6 / SF6 / SF7 / HS7 / SF / SLF / CLF *KD standard, KA, MK, GMK, GGMK upon request
<b>Backset</b>	Blank: 2-3/4" / R: 2-3/8" / E: 5"

