

DBT-1 Series

Deadbolt Locks

Specifications


- Door Thickness** 1-3/4" - 2" for DBT-1-52 and DBT-1-81
1-3/8" - 1-3/4" for all other functions
- Backset** 2-3/8" or 2-3/4" adjustable
- Strike** 1-1/8" x 2-3/4" square corner strike with reinforced plate
- Deadbolt** 1" throw, Anti-Saw pin
- Faceplate** 1" x 2-1/4" square corner standard
1-1/8" x 2-1/4" square corner optional
- Finish** 622, 626 or special finishes upon request
- Cylinder** Schlage C keyway 6 pin standard
SFIC less core 6 or 7 pin
(Interchangeable Core spacer for 6 pin included)
SFIC with core, 6 or 7 pin



DBT-1-50



DBT-1-52

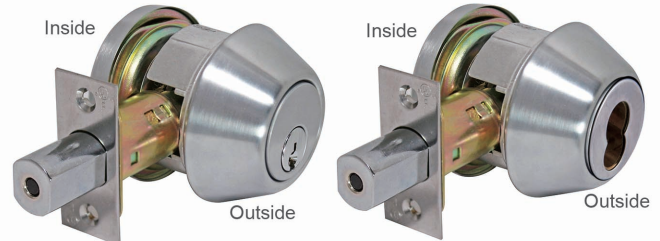

DBT-1-61

DBT-1-61 with IC housing

Functions

Series Number	Description
DBT-1-50	Thumb Turn only
DBT-1-52	Thumb Turn with blank plate
DBT-1-61	Single Cylinder with thumb turn
DBT-1-62	Double Cylinder
DBT-1-65	Cylinder with classroom* thumb turn
DBT-1-70	Thumb Turn with Indicator
DBT-1-81	Cylinder with blank plate

Code Compliance

ANSI/BHMA: A156.36 Grade 2 Certified

UL: UL 3 hour listed

Warranty

Limited 5 Year Warranty

How To Order

Series	DBT-1 Deadbolt Lock
Function	50: Thumb Turn only 52: Thumb Turn with blank plate 61: Single cylinder with thumb turn 62: Double cylinder 65: Cylinder with classroom* thumb turn 70: Thumb Turn with Indicator 81: Cylinder with blank plate
Finish	622/US19 Flat Black 626/US26D Satin Chrome Special finishes upon request
Cylinder	Standard: - Schlage C keyway 6 pin Optional: - IC: SFIC less core 6 or 7 pin Others available upon request



* Classroom- Thumb turn retracts but does not extend deadbolt