

TRXL-Heavy Duty Ligature Resistant Cylindrical



TRXL-84 (OUTSIDE)

Specification

- ANSI Grade 1 heavy duty cylindrical with ligature resistant lever trim
- Backset 2-3/4" standard, 5" optional
- Door thickness: 1-3/4"-2"
- Stainless steel lever trim
- Stainless steel deadlocking latch bolt, 1/2" throw
- Stainless steel ASA strike standard
- Tamper resistant mounting screws
- Non-handed
- Schlage "C" keyway, brass 6 pin cylinder standard
- SFIC with or less core available, 6 or 7 pin core
- High security cylinder available, TownSteel "L" keyway, 6 pin
- High security SFIC core available, TownSteel "L" keyway, 7 pin

- KD, KA, MK, GMK, GGMK and construction keying available
- Available functions: F-75, 76, 81, 84, 86, 87
- Available finish: US32D
- 10-year Manufacturer's Limited Warranty

Code Compliance


- ANSI/BHMA Certified A156.2-2011 Grade 1 Certified
- UL 10C Listed 3-Hour Fire Rating
- Meets requirements of The Buy American Act
- Meets requirement of The Americans with Disabilities Act

Important Note:

It is TownSteel's position that if any of our keyed locks are to be used less cylinder, whether I.C. or standard, and another manufacturer's cylinder is to be used in place of the TownSteel original manufacturer's cylinder, that a sample of that product be provided to TownSteel in advance for testing.



TRX-L ANSI Grade 1 Cylindrical Lock with Ligature Resistant Trim-Lever

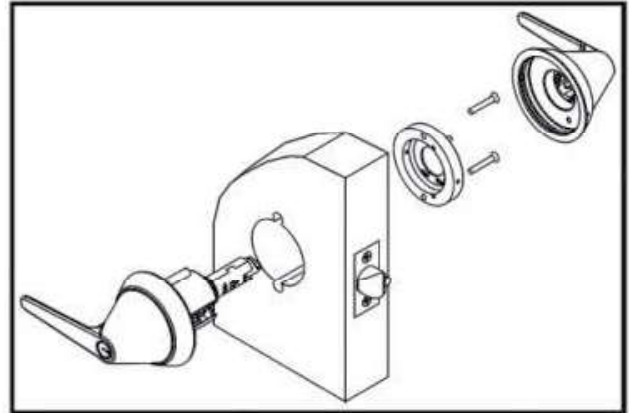

- Design impedes ability to attach laces, cords, and lines to the lever set
- Enhances opportunity to reduce accidents in health care facilities, detention centers and other potential high risk areas
- Designed to be an integral part of your Accident Prevention and Safety Program
- Outside clutching lever to protect lock against abuse and allow free rotation.
- Cylindrical is UL listed for a 3 hour fire door
- ADA compliant
- Meet or exceed ANSI 156.2-4000 Grade 1 Standard
- Tamper resistant mounting screws, standard
- Schlage C keyway, standard
- Small Format 6 or 7 pin Interchangeable Core (SFIC) available
- 32D Finish

How To Order

Trim	TRX-L Ligature Resistant Lever Grade 1 Cylindrical Lock
Function	Please Refer to Function Sheet
IC	IC

Example

1. Ligature Resistant Lever Cylindrical
2. Function
3. IC (optional)

TRX-L-81-IC

Important Note:

It is TownSteel's position that if any of our keyed locks are to be used less cylinder, whether I.C. or standard, and another manufacturer's cylinder is to be used in place of the TownSteel original manufacturer's cylinder, that a sample of that product be provided to TownSteel in advance for testing.

